



SPLIT SYSTEM AIR CONDITIONERS



Happiness starts at home.

HAPPINESS BEGINS WITH A DAIKIN

When the temperature's right inside your home or workplace, you also feel more comfortable.

On a really hot day, we can get cranky and irritable. While a cold day can leave us feeling dull and gloomy. A stable temperature can make you feel more comfortable in your environment.

That's why it's so important to ensure you get the best quality air conditioning for your home.

As a world leader in air conditioning and one of the largest manufacturers of air conditioners in Japan, Daikin can be trusted to keep your climate at the perfect temperature. After all, air conditioning is Daikin's main focus.

With operations around the globe Daikin has invested billions of dollars in research and development to produce air conditioning products that are energy efficient, quiet, simple to use, and reliable.

A Daikin Air Conditioner is an investment that will deliver significant benefits to you and your family's environment. You'll find over 400 Daikin Specialist Dealers right across Australia and New Zealand, so there's sure to be one right near you.



DAIKIN SPLIT SYSTEM RANGE

CONTENTS

Daikin Difference	2 – 3
Satisfaction Guaranteed	3
Range of Split Systems	4
Sensitive Choice	5
Daikin Technology	6 – 7
Key Features & Benefits	8 – 9
Features Checklist	10
Remote Control	11
Daikin Split Systems	12 – 20
Daikin Solutions	21 – 22
Air Conditioning Tips	23

		2.5kW	3.5kW	5.0kW	6.0kW	7.1kW	8.0kW	9.0kW	10.0kW
HEATING & COOLING	INVERTER R410A	FTXG25F Page 12	FTXG35F Page 12						
		FVXS25G Page 13	FVXS35G Page 13	FVXS50G Page 13	FVXS60H Page 13	FVXS71H Page 13			
		FTXS25G Page 14	FTXS35G Page 14	FTXS50G Page 15	FTXS60G Page 15	FTXS71G Page 15	FTXS80G Page 15		
							FTXS80H Page 17	FTXS90H Page 17	FTXS100H Page 17
			FLXS35G Page 18	FLXS50G Page 18	FLXS60G Page 18				
COOLING ONLY	HYBRID R410A	FTYN25G Page 20	FTYN35G Page 20	FTYN50G Page 20	FTYN60G Page 20				
	INVERTER R410A	FTKS25G Page 14	FTKS35G Page 14	FTKS50G Page 15	FTKS60G Page 15	FTKS71G Page 15			
	R22	FTKD25G Page 19	FTKD35G Page 19	FTKD50G Page 19	FTKD60G Page 19				

AIR CONDITIONING MADE EASY WITH DAIKIN

Like us, our Dealers are specialists. Their expertise ensures you get all the air conditioning help and advice you need.

A Daikin Specialist Dealer will devote time and effort to ensure you choose the right air conditioner for your individual needs.

This is critically important, having an air conditioner that is too small for the job means you'll be short on comfort; buying a model that's too big for your space means big energy bills. Your Daikin Specialist Dealer will recommend a size that's just right for you.

As well as great advice, your Daikin Specialist will give you one great price covering the cost of the air conditioner plus installation. And when your air conditioner is up and running they'll give you a thorough demonstration to ensure you get maximum comfort from your investment.

You've also got the support of one of the world's leading air conditioning brands. In the unlikely event that any problems should occur, Daikin's service network is on hand to help.

SATISFACTION GUARANTEED WITH DAIKIN SPLIT SYSTEMS

Daikin's comprehensive 5 year parts and labour warranty applies to all split products in this brochure; purchased and installed in Australia or New Zealand.

In the unlikely event of unit malfunction, Daikin has an established service department, including an in house call centre, spare parts division and technical support centre for all technical enquiries, ensuring prompt after sales support for all our customers.

Daikin also provides in depth training to its dealers and installers, allowing them to also provide extra sales support to consumers.



*Happiness is
in the air.*



FLEXIBLE LIVING WITH DAIKIN SPLIT SYSTEMS

YOUR CHOICE OF SPLIT SYSTEMS

A Daikin Split System will air condition one room or an area of your home.

Discreet wall-mounted models, compact floor consoles and versatile floor and ceiling units are all part of the Daikin range.

Split systems are available in Cooling Only and Heating and Cooling, plus you can choose from inverter and hybrid split system models.



WALL-MOUNTED DESIGNS

Daikin's wall-mounted, split system air conditioning is an exceptional choice for those wanting a neat unit that blends unobtrusively with its surroundings.

The same advanced technology that makes the Daikin indoor unit so compact also makes it powerful yet quiet and kind on energy costs.

The pleasing design of the units also has functional appeal. The smooth surface of the flat panel models can be simply wiped clean and the flat panel easily removed for more thorough cleaning.

Daikin's air-purifying filters and innovative airflow systems ensure that fresh, conditioned air flows to every corner of the room.

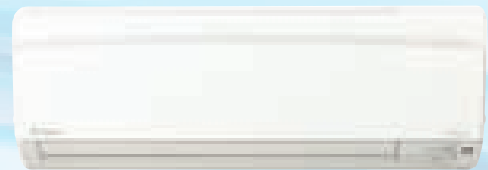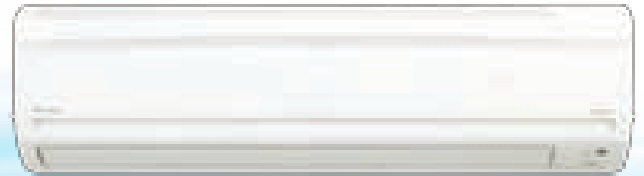

FLEXI UNITS

The clever design of these units allows them to go on the wall at floor level or attached to a ceiling, offering flexibility and variety to Daikin's extensive range of air conditioners.



FLOOR-STANDING UNITS

Daikin's floor-standing, split system air conditioners are compact and ideal for those wanting to position their unit closer to the floor.

They can even be semi-recessed into the wall. The units use either top, or top and bottom discharges with wide-angle louvres and top discharge auto-swing to effectively distribute air right across the area. Daikin's leading edge technology, together with quality design, delivers superior air conditioning to your home.




Breathe a sigh
of relief.

DAIKIN. A SENSITIVE CHOICE.

THE ONLY SPLIT SYSTEM AIR CONDITIONERS

When the National Asthma Council Australia and the Asthma & Respiratory Foundation New Zealand introduced its new **Sensitive Choice** program to help identify products that are better suited for people who suffer from asthma and allergies, they chose Daikin as the only split system air conditioner authorised to display the **Sensitive Choice** butterfly symbol.

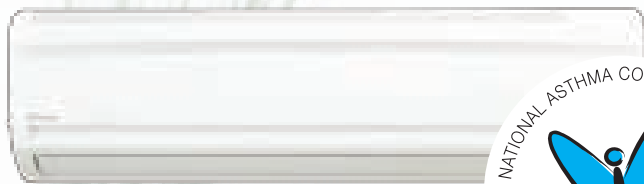

Advanced filters.

Daikin Split System Air Conditioners have advanced air-purifying filters that may help to reduce some of the triggers that affect asthma and allergy sufferers and help to provide a cleaner and healthier indoor environment.

Double action.

All Daikin Split Systems have been fitted with an air-purifying filter. Most of these split systems are fitted with a more advanced Titanium Apatite Photocatalytic Air Purifying filter. These filters not only trap microscopic airborne particles, but also decompose odours and adsorb and deactivate bacteria and viruses. There are also mould-proof filters and a mould-proof operation that helps prevent the generation of mould and mould odours inside the unit.

Doubly sure.

To be sure you get the right advice and the split system that's right for your home, talk to a Daikin Specialist Dealer. This ensures professional installation, all backed up by Daikin's 5-year warranty.





DAIKIN TECHNOLOGY DELIVERS

Daikin's advanced technology includes many innovative and patented features that are designed to make our units more energy efficient, quieter and more reliable. An easy-to-operate remote control and programmable settings help to ensure the temperature in your home is just the way you like it.

DAIKIN'S INVERTER DIFFERENCE

Daikin Inverter Air Conditioners are more powerful, however, they are also more energy efficient than conventional, non-inverter models. Conventional air conditioners operate at a fixed speed, delivering a fixed amount of cooling and heating. While trying to maintain a set temperature they operate on a 'stop/start' principle. A Daikin Inverter has a more advanced technology that operates differently. It works like the accelerator of a car, gently increasing or decreasing power to suit prevailing conditions. It reaches the desired temperature quicker and steadily maintains it without wild fluctuations. That means uninterrupted comfort and significant savings on running costs.

Daikin Inverter models are also very reliable, in extremes. Your Daikin Inverter's operation is certified to operate, giving you relief even when the mercury soars to as high as 46°C or falls to minus 10°C, and as low as minus 15°C in some units.

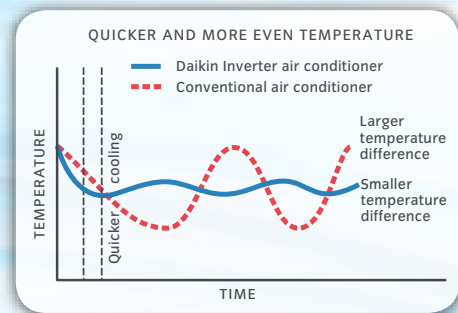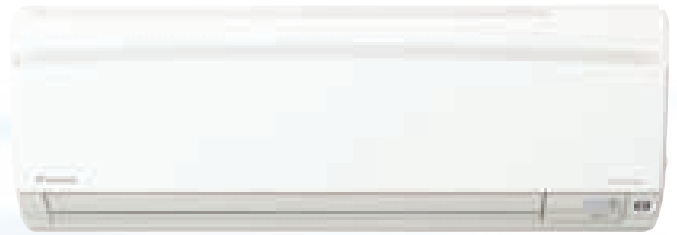

There's no place like home.

ULTIMATE COMFORT FOR YOUR HOME

SOUND EFFICIENT

SWING COMPRESSOR




The design of the swing compressor reduces friction during operation for smoother and quieter rotation with less vibration resulting in a more durable compressor. It also minimises the leakage of refrigerant gas during compression. The result is an air conditioner that operates quietly and efficiently.

ENERGY EFFICIENT

RELUCTANCE DC MOTOR

Daikin's Reluctance DC motors utilise powerful neodymium magnets that are 10 times more powerful than conventional magnets. By maximising torque, Daikin's Reluctance DC motors can boost efficiencies 20% higher than conventional motors.

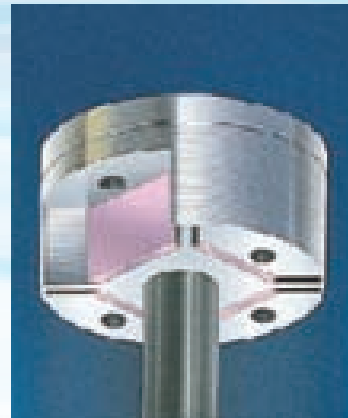

PAM CONTROL

PAM Control



Pulse Amplitude Modulation Technology is one of the keys to Daikin's success in producing an air conditioner that offers high power while maintaining excellent energy efficiency. The PAM control reduces energy loss by controlling how often the converter switches on and off.

DAIKIN'S REFRIGERANT TECHNOLOGY

Daikin Split Systems operate with the R410A. R410A refrigerant provides excellent stability, low toxicity and non-combustibility.

R-410A

KEY FEATURES & BENEFITS

SUPERIOR COMFORT CONTROL



Indoor Unit Quiet Operation. Sound levels are reduced by 2-3 decibels (dB) from the low fan speed for quieter and gentler heating and cooling.



Outdoor Unit Quiet Operation. Outdoor unit sound levels can be reduced by 3dB for times when quieter operation is needed.



Intelligent Eye.

The intelligent eye is an infrared sensor with the ability to sense movement in the room. When you are in the room, the air conditioner operates normally. If you leave the room for more than 20 minutes the air conditioner automatically changes to an energy-saving operation. Using the intelligent eye, savings of up to 20% in cooling and up to 30% in heating, can be achieved.



Automatic Operation (reverse cycle only).

For unattended year-round comfort, this function allows the unit to automatically switch between heating and cooling modes as required.



Programme Dry Function. This gives priority to reducing the level of humidity in the room rather than room temperature.



Auto Fan Speed. To reduce operating noise, the fan speed is automatically controlled by the micro-processor to suit the thermostat setting and prevailing room temperature.



Hot Start. When the heating operation starts or when the unit changes from cooling to heating there is no cold draught released into the room.

LIFESTYLE CONVENIENCE



Econo Mode. Econo Mode limits the maximum operating current and power consumption of the outdoor unit by approximately 30% during start-up. This saves energy and reduces the load on the electrical circuit when multiple electrical devices are used simultaneously.



Inverter Powerful Operation. Pushing the POWERFUL button on the remote control gives you a boost in cooling or heating power for a 20-minute period, even if the unit is already operating at high capacity.



Home Leave Operation. Select this energy saving function when leaving the house and the air conditioner will operate at a pre-selected temperature. Your home can then be warmed or cooled much quicker upon your return. It can also be used to record your preferred (default) settings.



Indoor Unit On/Off Switch. A convenient on/off switch on the indoor unit allows you to start up the system even if you have misplaced the remote control or the remote control batteries are exhausted.

COMFORTABLE AIRFLOW



Wide Angle Louvres. Smoothly curved wide-angle louvres provide wide airflow coverage for effective heating and cooling no matter where the indoor unit is placed within the room.



Dual Flap System.

This unique system directs warm air to the floor in winter and cool air across the room in summer for maximum efficiency and comfort. The large flap governs airflow direction while the small flap (or diffuser) swings, producing fine air currents that help circulate the air around the room.




Comfortable Mode.

The new flap changes the delivery angle to horizontal for cooling and vertical for heating operation, to prevent cold or warm air from blowing directly onto your body.



Vertical Auto-Swing (up and down).

The vertical auto swing automatically sweeps the air across the room in an up and down motion. When the unit is switched off, the louvres close automatically.



Horizontal Auto-Swing (left and right).

Automatically moves to ensure an even distribution of air throughout a room.



3-D Airflow. Combines vertical and horizontal auto-swing to circulate cool/warm air to the corners of large spaces.

WORRY FREE



Auto-Restart. The unit memorises the operation mode, airflow and temperature settings. Should there be a power failure when the unit is in operation, it will automatically return to the same operating conditions when the power is restored.



Self-Diagnosis. In the event that a problem develops with the unit, malfunction codes can be displayed on the liquid crystal panel of the remote control for fast and easy fault diagnosis.



Anti-Corrosion. The special anti-corrosion coating on the outdoor unit heat exchanger ensures greater resistance to salt damage and atmospheric corrosion.

HEALTHY AND CLEAN



Mould-Proof Operation. Mould-proof operation automatically runs the fan on an ultra low speed for one hour when cooling or dry operation is stopped. This prevents the generation of mould and mould odours inside the indoor unit.




Photocatalytic Deodorising Filter. This traps and decomposes odours and even adsorbs and deactivates bacteria and viruses. The filter is maintained by exposing it to sunlight once every six months.



Air-Purifying Filter. The air-purifying filters trap fine airborne particles as small as 0.01 microns in size (e.g. smoke particles), to purify the air in your room.



Air-Purifying Filter with Photocatalytic Deodorising Function. This combination operates as a highly-effective unit. The filter traps microscopic particles, decomposes odours and neutralises bacteria and viruses. The filter can be used for approximately three years if periodic maintenance is performed.



Titanium Apatite Photocatalytic Air-Purifying Filter. This filter combines the air-purifying filter and titanium apatite photocatalytic deodorising filter in a single highly effective unit. The filter traps microscopic particles, decomposes odours and even adsorbs and deactivates bacteria and viruses. It lasts for three years without replacement if washed once every six months.



Mould-Proof Air Filter. The pre-filter net is impregnated with a safe, colourless and odourless mould preventative. This renders the filter virtually immune to mould.



Wipe-Clean Flat Panels. The flat panel models can be cleaned with only the single pass of a cloth across their smooth surface. The flat panel can also be easily removed for more thorough cleaning.



Washable Grille. The front grille of the indoor unit is detachable to allow for easy cleaning. The panel can be wiped over with a soft cloth and mild detergent solution and then simply snapped back into position.

TIMERS



24-Hour On/Off Timer. The timer can be preset to start and stop the air conditioner at any time within a 24-hour period. Once the times are set, the air conditioner can be operated for a period by simply pressing the ON or OFF timer buttons.



Weekly Timer. The NEW weekly timer function makes it easy to enter up to four settings per day for each day of the week. The weekly timer function not only allows you to program on and off time, but also the desired temperature.



Night Set Mode. Through the use of the 'Timer-OFF Circuit', the preset room temperature gently rises in cooling or falls in heating before the unit stops. This energy-saving feature allows you to sleep comfortably without feeling a sudden change in the room temperature, while at the same time saving energy.

KEEPING WARM

Quick Warming Function. Preheats the compressor to shorten the time required to discharge warm air.

Automatic Defrosting. Sensor performs automatic defrosting of the outdoor heat exchanger if necessary, ensuring optimum heating performance.

OPTIONS


































Centralised Control. Centralised control of up to five systems is possible using a central control panel and an optional wiring adaptor.











External ON/OFF Control. Control of the system by an external field-supplied time clock is possible with an optional wiring adaptor PCB.


FEATURES CHECKLIST

		INVERTER HEATING & COOLING				INVERTER HEATING & COOLING/ COOLING ONLY		INVERTER COOLING ONLY		HYBRID HEATING & COOLING	
		FTXG25F FTXG35F	FVXS25G FVXS35G FVXS50G FVXS60H FVXS71H	FTXS80H FTXS90H FTXS100H	FLXS35G FLXS50G FLXS60G	FTXS25G FTXS35G	FTXS50G FTXS60G FTXS71G FTXS80G FTXS90G			FTYN25G FTYN35G	FTYN50G FTYN60G
Heating & Cooling											
Cooling Only						FTKS25G FTKS35G	FTKS50G FTKS60G FTKS71G	FTKD25G FTKD35G	FTKD50G FTKD60G		
		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Comfortable Airflow	 Power-Airflow Dual Flaps			✓		✓	✓	✓	✓	✓	✓
	 Wide-Angle Louvres	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	 Vertical Auto-Swing (up and down)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	 Horizontal Auto-Swing (left and right)	✓		✓			✓		✓		
	 3-D Airflow	✓		✓			✓		✓		
 Comfortable Mode	✓		✓								
Comfort Control	 Indoor Unit Quiet Operation	✓	✓	✓	✓	✓	✓	✓	✓		
	 Outdoor Unit Quiet Operation	✓	✓	✓	✓	✓	✓	✓	✓		
	 Intelligent Eye	✓		✓		✓	✓	✓	✓		
	 Automatic Operation	✓	✓	✓	✓	✓*	✓*			✓	✓
	 Programme Dry Function	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	 Auto Fan Speed	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	 Hot Start	✓	✓		✓	✓*	✓*			✓	✓
Healthy and Clean	 Photocatalytic Deodorising Filter				✓			✓			
	 Air-Purifying Filter				✓			✓			
	 Air-Purifying Filter with Photocatalytic Deodorising Function								✓		
	 Titanium Apatite Photocatalytic Air-Purifying Filter	✓	✓	✓		✓	✓			✓	✓
	 Mould-Proof Operation			✓		✓		✓			
	 Mould-Proof Air Filter	✓	✓		✓	✓	✓	✓	✓	✓	✓
	 Washable Grille					✓	✓	✓	✓	✓	✓
 Wipe Clean Flat Panel	✓	✓	✓		✓	✓	✓	✓	✓	✓	
Lifestyle	 Econo Mode		✓	✓		✓		✓			
	 Inverter Powerful Operation	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	 LCD Wireless Remote Control	✓	✓		✓	✓	✓	✓	✓	✓	✓
	 Home Leave Operation				✓		✓		✓		
Timers	 Indoor Unit On/Off Switch	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	 24-Hour On/Off Timer	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	 Weekly Timer		✓	✓							
Worry Free	 Night Set Mode	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	 Auto-Restart after Power Failure	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Self-Diagnosis with Digital Display	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Anticorrosion Treatment of Outdoor Heat Exchanger Fin	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	

*Only available in Heating & Cooling Models.

REMOTE CONTROLLERS

-  **1** Vertical Auto-Swing (up and down)
-  **2** Selects between 5 fan speeds and Indoor Unit Quiet Operation
-  **3** Selects mode: automatic, cooling, heating, dry, fan-only operation
-  **4** Outdoor Unit Quiet Operation
-  **5** Intelligent Eye
-  **6** Horizontal Auto-Swing (left and right)
- 7** Cancels On/Off Timer
-  **8** 24-Hour On Timer
-  **9** 24-Hour Off Timer and Night Set Mode
- 10** Sets Timer
- 11** Displays Time

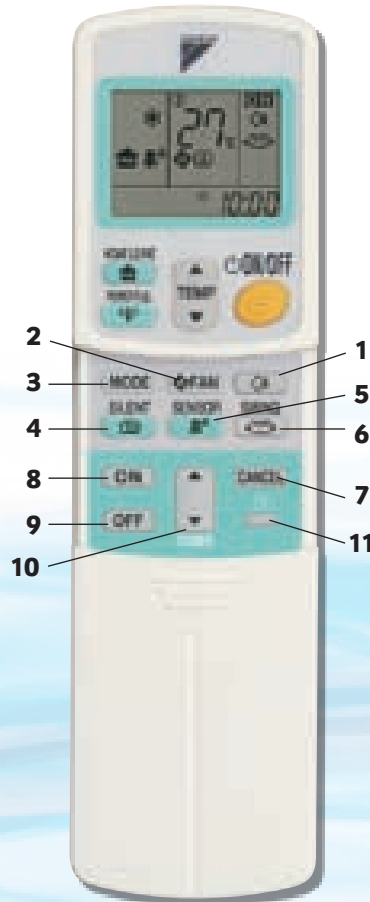


*Applicable to all models except FVXS models and the FTXS-H range

LCD WIRELESS REMOTE CONTROL


This remote control puts superior comfort at your fingertips. Frequently used buttons are instantly accessible while other buttons are under the cover of the remote. A large liquid crystal display panel makes it easy to read the settings and the On/Off button has a raised dot so that you can feel it in the dark.

NEWLY DEVELOPED WIRELESS REMOTE CONTROLLER

The remote controller with a backlit liquid crystal display and luminescent control buttons, also features a built-in weekly time clock that can be programmed on or off to suit your personal lifestyle with up to four actions per day for each day of the week. The intelligent controller not only allows you to program on and off time, but also the desired temperature. Furthermore, the copy function enables any daily program to be replicated on any other day or days as required. Correct programming of the unit will also result in considerable energy savings.



The LCD panel with backlight
A luminescent material is used for the buttons on the surface.

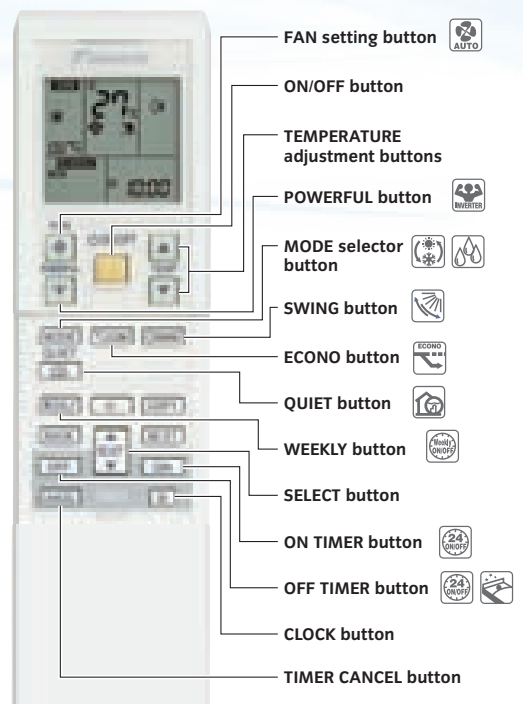

Applicable to FVXS models.

The F Series: An innovative sense of style



NOTES

- The Rated Capacity, Power Input and Running Current are determined under conditions T1 (cooling) or H1 (heating) of AS/NZS 3823.1.1.
- The cooling (or heating) output capacity will be reduced below the rated value as the outdoor temperature approaches the maximum (or minimum) outdoor temperature operating range limit.
- Indoor unit sound levels are determined in an anechoic chamber at a distance of 1 metre from the front of the unit. They are normally higher during actual operation due to ambient noise.
- The current Energy Star Rating Scheme does not cover the determination of seasonal or part load efficiencies, which provide a better indication of efficiency under actual operating conditions. For this reason, the energy savings potential of inverter air conditioners is not reflected in the Star Rating.
- Inverter air conditioners do not have a current surge during start up. The compressor Start Current of an inverter air conditioner is typically lower than specified Running Current.

		HEATING & COOLING			
INDOOR		FTXG25FVMAW	FTXG35FVMAW	FTXG25FVMAS	FTXG35FVMAS
OUTDOOR		RXG25FVMA	RXG35FVMA	RXG25FVMA	RXG35FVMA
Rated Capacity	Cool (kW)	2.5	3.5	2.5	3.5
	Heat (kW)	3.4	4.2	3.4	4.2
Capacity Range	Cool (kW)	1.3-3.0	1.4-3.8	1.3-3.0	1.4-3.8
	Heat (kW)	1.3-4.5	1.4-5.0	1.3-4.5	1.4-5.0
Indoor Airflow Rate (Hi)	Cool (l/s)	128	135	128	135
	Heat (l/s)	150	160	150	160
Indoor Fan Speeds		5 steps, quiet and automatic			
Energy Label/ Star Ratings	Cool	6	5	6	5
	Heat	6	5.5	6	5.5
Front Panel Colour		Matt crystal white		Matt crystal silver	
Power Supply		1 phase, 220-240V, 50Hz			
Power Input (Min-rated-max)	Cool (kW)	0.30-0.62-0.95	0.30-1.11-1.29	0.30-0.62-0.95	0.30-1.11-1.29
	Heat (kW)	0.29-0.88-1.42	0.31-1.21-1.56	0.29-0.88-1.42	0.31-1.21-1.56
C.O.P.	C/H	4.0/3.9	4.0/3.9	3.2/3.5	3.2/3.5
Dimensions (H x W x D)	Indoor (mm)	275 x 840 x 150		275 x 840 x 150	
	Outdoor (mm)	550 x 765 x 285		550 x 765 x 285	
Weight	Indoor (Kg)	9			
	Outdoor (Kg)	34			
Compressor Type		Hermetically sealed swing type			
Refrigerant Type		R410A			
Max Pipe Length	(m)	20			
Max Level Difference	(m)	15			
Refrigerant Pipe Size	Liquid (mm)	Ø 6.4			
	Gas (mm)	Ø 9.5			
	Drain (mm)	Ø 18.0			
Operating Range (outdoor temp)	Cool (CDB)	10 to 46°			
	Heat (CWB)	-15 to 20°			
Indoor Sound Level (H/L/SL)	Cool (dBA)	39/30/27	40/32/29	39/30/27	40/32/29
	Heat (dBA)	39/30/27	41/31/28	39/30/27	41/31/28
Outdoor Sound Level (H/L)	Cool (dBA)	46/43	47/44	46/43	47/44
	Heat (dBA)	47/44	48/45	47/44	48/45
EPA Sound Power Level	Outdoor (dBA)	62	63	62	63

Floor Standing: *Style and comfort in a compact design*



CONTROLLER	INDOOR UNIT	OUTDOOR UNIT	
R-410A			
	(FVXS25/35/50G)	(RXS25/35E)	(RXS50F)
	(FVXS60/71H)	(RXS60/71H)	


NEW!
6kW and 7.1kW
available
January 2009

		HEATING & COOLING				
INDOOR		FVXS25GV1A	FVXS35GV1A	FVXS50GV1A	FVXS60HVMA*	FVXS71HVMA*
OUTDOOR		RXS25EBVMA	RXS35EBVMA	RXS50FBVMA	RXS60HVMA*	RXS71HVMA*
Rated Capacity	Cool (kW)	2.5	3.4	4.9	6.0	7.1
	Heat (kW)	3.3	4.4	5.7	7.0	8.2
Capacity Range	Cool (kW)	1.3-3.0	1.4-3.8	1.4-5.6	2.3-6.7	2.3-8.5
	Heat (kW)	1.3-4.5	1.4-5.0	1.4-8.1	2.3-9.0	2.3-10.0
Indoor Airflow Rate (Hi)	Cool (l/s)	136	141	178	280	293
	Heat (l/s)	146	156	196	312	325
Indoor Fan Speeds		5 steps, quiet and automatic				
Energy Label/ Star Ratings	Cool	6	5.5	4.5	4	4
	Heat	6	5	5	4.5	3.5
Front Panel Colour		White				
Power Supply		1 phase, 220-240V, 50Hz				
Power Input (Min-rated-max)	Cool (kW)	0.30-0.59-0.92	0.30-1.03-1.25	0.50-1.57-2.0	0.58-1.98-2.39	0.57-2.36-3.35
	Heat (kW)	0.29-0.79-1.39	0.31-1.24-1.88	0.50-1.62-2.6	0.62-2.06-2.84	0.52-2.80-3.85
C.O.P.	C/H	4.2/4.2	3.4-3.6	3.1-3.5	3.0-3.4	3.0/3.2
Dimensions (H x W x D)	Indoor (mm)	600 x 700 x 210			770 x 850 x 290	
	Outdoor (mm)	550 x 765 x 285		735 x 825 x 300	770 x 900 x 320	
Weight	Indoor (Kg)	14			25	
	Outdoor (Kg)	34	48		71	
Compressor Type		Hermetically sealed swing type				
Refrigerant Type		R410A				
Max Pipe Length	(m)	20	30		30	
Max Level Difference	(m)	15	20		20	
Refrigerant Pipe Size	Liquid (mm)	Ø 6.4			Ø 6.4	
	Gas (mm)	Ø 9.5	Ø 12.7		Ø 12.7	Ø 15.9
	Drain (mm)	Ø 20			Ø 18	
Operating Range (outdoor temp)	Cool (CDB)	10 to 46°			10 to 46°	
	Heat (CWB)	-15 to 18°			-15 to 18°	
Indoor Sound Level (H/L/SL)	Cool (dBA)	38/26/23	39/27/24	44/36/32	45/36/33	46/37/34
	Heat (dBA)	38/26/23	39/27/24	45/36/32	45/36/33	46/37/34
Outdoor Sound Level (H/L)	Cool (dBA)	46/43	47/44	47/44	49/46	52/49
	Heat (dBA)	47/44	48/45	48/45	49/46	52/49
EPA Sound Power Level	Outdoor (dBA)	62	63	62	63	66

For additional information on products in this table refer to notes on page 12.

* Available January 2009.

Wall Mounted: Inverter Heating and Cooling, Cooling only




		COOLING ONLY		HEATING & COOLING	
INDOOR		FTKS25GVMA	FTKS35GVMA	FTXS25GVMA	FTXS35GVMA
OUTDOOR		RKS25EBVMA	RKS35EBVMA	RXS25EBVMA	RXS35EBVMA
Rated Capacity	Cool (kW)	2.5	3.3	2.5	3.3
	Heat (kW)			3.4	3.9
Capacity Range	Cool (kW)	1.2-3.0	1.2-3.8	1.2-3.0	1.2-3.8
	Heat (kW)			1.2-4.5	1.2-5.0
Indoor Airflow Rate (HI)	Cool (l/s)	145	148	145	148
	Heat (l/s)			156	161
Indoor Fan Speeds		5 steps, quiet and automatic			
Energy Label/ Star Ratings	Cool	6	5.5	6	5.5
	Heat			6	5.5
Front Panel Colour		White			
Power Supply		1 phase, 220-240V, 50Hz			
Power Input (Min-rated-max)	Cool (kW)	0.30-0.60-0.80	0.30-1.01-1.20	0.30-0.60-0.80	0.30-1.01-1.20
	Heat (kW)			0.29-0.84-1.34	0.29-1.11-1.55
C.O.P.	C/H	4.1	3.3	4.1/4.0	3.3/3.5
Dimensions (H x W x D)	Indoor (mm)	283 x 800 x 195		283 x 800 x 195	
	Outdoor (mm)	550 x 765 x 285		550 x 765 x 285	
Weight	Indoor (Kg)	9		9	
	Outdoor (Kg)	34		34	
Compressor Type		Hermetically sealed swing type			
Refrigerant Type		R410A			
Max Pipe Length	(m)	20		20	
Max Level Difference	(m)	15		15	
Refrigerant Pipe Size	Liquid (mm)	Ø 6.4		Ø 6.4	
	Gas (mm)	Ø 9.5		Ø 9.5	
	Drain (mm)	Ø 18.0		Ø 18.0	
Operating Range (outdoor temp)	Cool (CDB)	10 to 46°		10 to 46°	
	Heat (CWB)			-10 to 20°	
Indoor Sound Level (H/M/L/SL)	Cool (dBA)	37/31/25/22	38/32/26/23	37/31/25/22	38/32/26/23
	Heat (dBA)			37/33/28/25	38/34/29/26
Outdoor Sound Level (H/L)	Cool (dBA)	46/43	47/44	46/43	47/44
	Heat (dBA)			47/44	48/45
EPA Sound Power Level	Outdoor (dBA)	61	62	62	63

For additional information on products in this table refer to notes on page 12.



Wall Mounted: Inverter Heating and Cooling, Cooling only

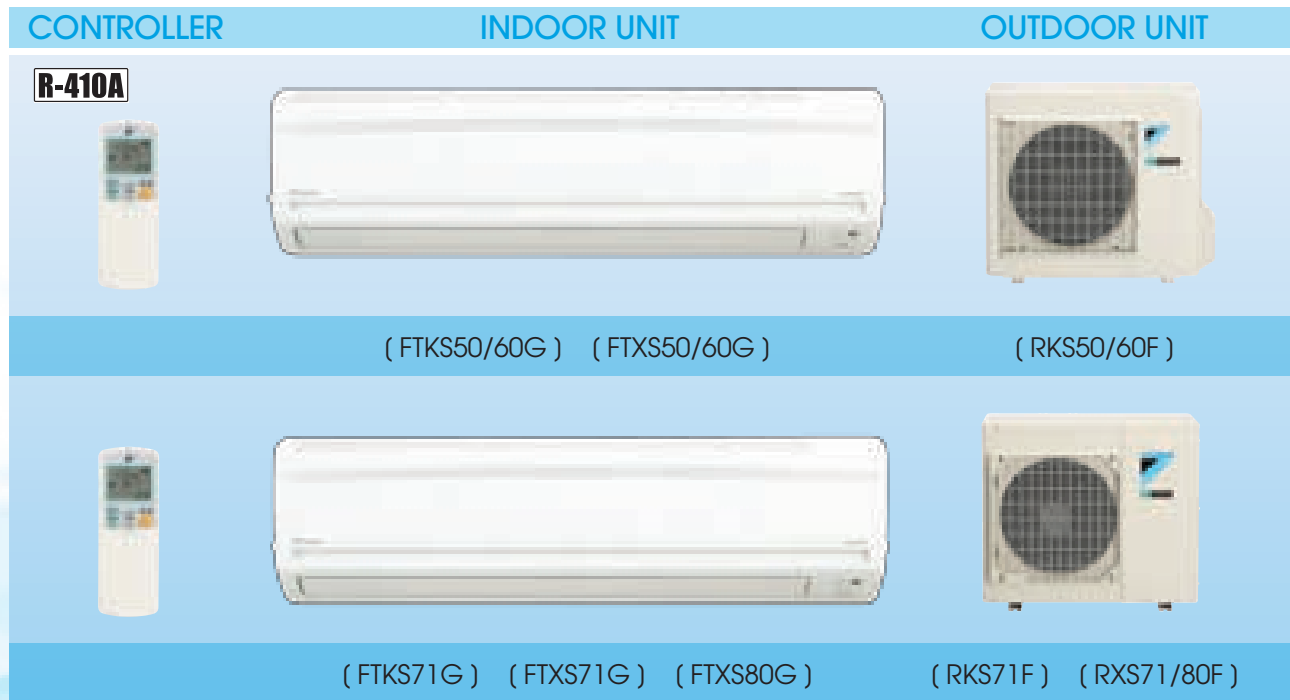

		COOLING ONLY			HEATING & COOLING			
INDOOR		FTKS50GVMA	FTKS60GVMA	FTKS71GVMA	FTXS50GVMA	FTXS60GVMA	FTXS71GVMA	FTXS80GVMA
OUTDOOR		RKS50FBVMA	RKS60FBVMA	RKS71FBVMA	RXS50FBVMA	RXS60FBVMA	RXS71FBVMA	RXS80FBVMA
Rated Capacity	Cool (kW)	5.2	5.9	7.1	5.2	5.9	7.1	7.8
	Heat (kW)				5.9	7.0	8.0	9.5
Capacity Range	Cool (kW)	1.7-6.0	1.7-6.7	2.3-7.4	1.7-6.0	1.7-6.7	2.3-7.4	2.3-9.0
	Heat (kW)				1.7-7.7	1.7-8.0	2.3-10.0	2.3-10.2
Indoor Airflow Rate (Hi)	Cool (l/s)	245	270	290	245	270	290	352
	Heat (l/s)				270	290	358	383
Indoor Fan Speeds		5 steps, quiet and automatic						
Energy Label/ Star Ratings	Cool	5	4	4	5	4	4	3.5
	Heat				5	4.5	4	3
Front Panel Colour		White						
Power Supply		1 phase, 220-240V, 50Hz						
Power Input (Min-rated-max)	Cool (kW)	0.44-1.50-2.08	0.44-2.05-2.39	0.57-2.38-3.20	0.44-1.50-2.08	0.44-2.05-2.39	0.57-2.38-3.20	0.57-2.74-3.50
	Heat (kW)				0.40-1.61-2.53	0.40-2.03-2.81	0.52-2.47-3.73	0.52-3.22-3.82
C.O.P.		3.4	2.9	3.0	3.4-3.6	2.9-3.4	3.0-3.3	2.8-3.0
Dimensions (H x W x D)	Indoor (mm)	290 x 1050 x 238			290 x 1050 x 238			
	Outdoor (mm)	735 x 825 x 300		770 x 900 x 320	735 x 825 x 300		770 x 900 x 320	
Weight	Indoor (Kg)	12			12			
	Outdoor (Kg)	47		71	48		71	
Compressor Type		Hermetically sealed swing type						
Refrigerant Type		R410A						
Max pipe Length (m)		30			30			
Max level Difference (m)		20			20			
Refrigerant Pipe Size	Liquid (mm)	Ø 6.4			Ø 6.4			
	Gas (mm)	Ø 12.7		Ø 15.9	Ø 12.7		Ø 15.9	Ø 15.9
	Drain (mm)	Ø 18.0			Ø 18.0			
	Operating Range (outdoor temp)	Cool (CDB)			10 to 46°			
		Heat (CWB)			10 to 46°			
					-15 to 18°			
Indoor Sound Level (H/M/L/SL)	Cool (dBA)	44/40/35/32	45/41/36/33	46/42/37/34	44/40/35/32	45/41/36/33	46/42/37/34	49/45/40/37
	Heat (dBA)				42/38/33/30	44/40/35/32	46/42/37/34	49/44/38/35
Outdoor Sound Level (H/L)	Cool (dBA)	47/44	49/46	52/49	47/44	49/46	52/49	54/51
	Heat (dBA)				48/45	49/46	52/49	54/51
EPA Sound Power Level		Outdoor (dBA)	61	63	66	62	63	66

For additional information on products in this table refer to notes on page 12.

Wall Mounted:

NEW 10kW
available in
this series!

The new H series models now available in a wider range to give you more options to suit your needs. All models from 8.0 to 10.0 kW feature high efficiency and a unified sleek flat panel design, allowing them to be coordinated easily with any interior decor.


KEY FEATURES OF THIS NEW MODEL

EFFICIENCY

The DC inverter series achieves high energy efficiencies thanks to its swing compressor with reluctance DC motor for compressor and DC motor for fan.

WEEKLY TIMER & BACKLIT CONTROLLER

The remote controller features a built-in weekly time clock that can be programmed to suit your personal lifestyle, with up to 4 actions per day for each day of the week. It allows you to programme not only the on and off times but the desired temperature. Furthermore, the copy function enables any daily programme to be replicated on any other day or days as required. The remote controller also features a backlit liquid crystal display (LCD) and luminescent control buttons.

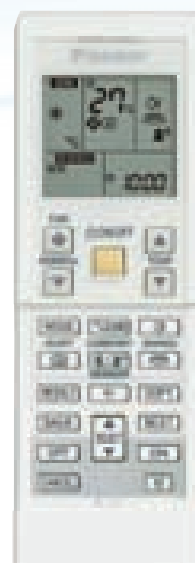

Wireless remote controller




Operation buttons



LCD panel with backlight

The new “H” series

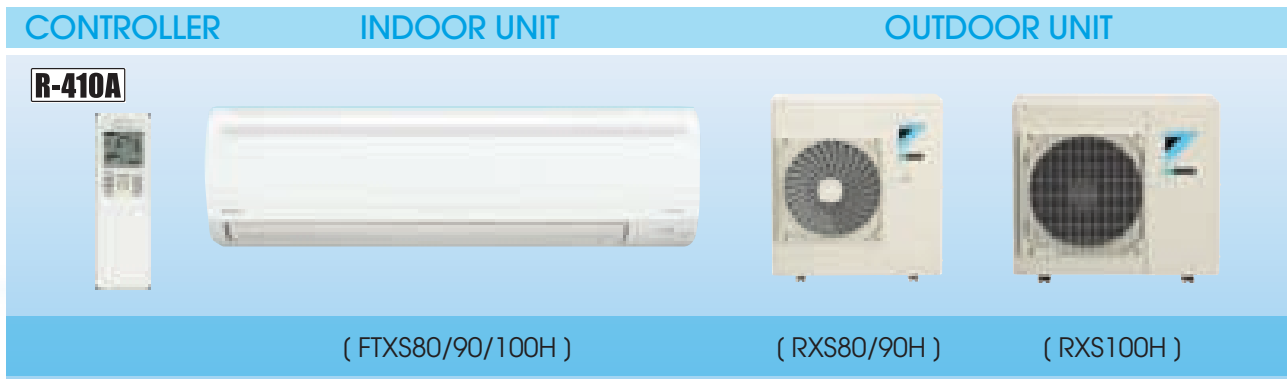

		HEATING & COOLING		
INDOOR		FTXS80HVMA	FTXS90HVMA	FTXS100HVMA
OUTDOOR		RXS80HVMA	RXS90HVMA	RXS100HVMA
Rated Capacity	Cool (kW)	8.0	9.0	9.9
	Heat (kW)	9.5	10.0	11.0
Capacity Range	Cool (kW)	2.3-9.5	2.3-10.5	3.0-11.2
	Heat (kW)	2.3-10.5	2.3-11.2	3.0-11.7
Indoor Airflow Rate (Hi)	Cool (l/s)	396		
	Heat (l/s)	401		
Indoor Fan Speeds		5 steps, quiet and automatic		
Energy Label/ Star Ratings	Cool	4.5	3	3
	Heat	3.5	3	2.5
Front Panel Colour		Ivory White		
Power Supply		1 phase, 220-240 V, 50Hz / 1 phase, 220-230 V, 60Hz		
Power Input (Min-rated-max)	Cool (kW)	0.57-2.58-3.80	0.57-3.32-4.32	0.62-3.67-4.52
	Heat (kW)	0.52-3.06-3.87	0.52-3.33-4.34	0.62-4.00-4.57
C.O.P.	C/H	3.1/3.1	3.7-3.0	2.7/2.8
Dimensions (H x W x D)	Indoor (mm)	340 x 1200 x 240		
	Outdoor (mm)	770 x 900 x 320		990 x 940 x 320
Weight	Indoor (Kg)	17		
	Outdoor (Kg)	71		80
Compressor Type		Hermetically sealed swing type		
Refrigerant Type		R410A		
Max Pipe Length	(m)	30		
Max Level Difference	(m)	20		
Refrigerant Pipe Size	Liquid (mm)	Ø 9.5		
	Gas (mm)	Ø 15.9		
	Drain (mm)	Ø 18.0		
Operating Range (outdoor temp)	Cool (CDB)	10 to 46°		
	Heat (CWB)	-15 to 18°		
Indoor Sound Level (H, M, L, SL)	Cool (dBA)	49/45/40/37		
	Heat (dBA)	49/44/38/35		
Outdoor Sound Level (H/L)	Cool (dBA)	54/51		
	Heat (dBA)	54/51		55/51
EPA Sound Power Level	Outdoor (dBA)	68		69


For additional information on products in this table refer to notes on page 12.

Flexi Units: *Inverter Heating and Cooling*



INDOOR UNIT

R-410A

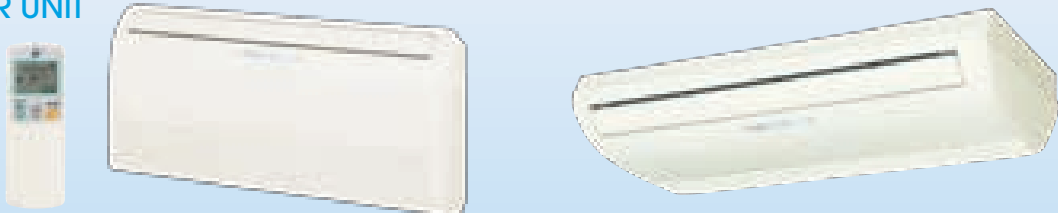

(FLXS35/50/60G)

OUTDOOR UNIT



(RXS35E)

(RXS50/60F)

		HEATING & COOLING		
INDOOR		FLXS35GVMA	FLXS50GVMA	FLXS60GVMA
OUTDOOR		RXS35EBVMA	RXS50FBVMA	RXS60FBVMA
Rated Capacity	Cool (kW)	3.3	5.2	5.5
	Heat (kW)	4.0	6.1	7.1
Capacity Range	Cool (kW)	1.2-3.8	1.7-5.3	1.7-6.5
	Heat (kW)	1.2-5.0	1.7-7.5	1.7-8.0
Indoor Airflow Rate (Hi)	Cool (l/s)	143	190	200
	Heat (l/s)	163	202	213
Indoor Fan Speeds		5 steps, quiet and automatic		
Energy Label/ Star Ratings	Cool	4.5	3.5	4
	Heat	4	4.5	2.5
Front Panel Colour		Almond White		
Power Supply		1 phase, 220-240V, 50Hz		
Power Input (Min-rated-max)	Cool (kW)	0.30-1.09-1.23	0.44-1.75-1.95	0.44-1.97-2.62
	Heat (kW)	0.29-1.25-1.85	0.40-1.95-2.63	0.40-2.57-3.24
C.O.P.	C/H	3.0/3.2	3.0/3.1	2.8/2.7
Dimensions (H x W x D)	Indoor (mm)	490 x 1050 x 200		
	Outdoor (mm)	550 x 765 x 285	735 x 825 x 300	
Weight	Indoor (Kg)	16	17	
	Outdoor (Kg)	34	48	
Compressor Type		Hermetically sealed swing type		
Refrigerant Type		R410A		
Max Pipe Length	(m)	20	30	
Max Level Difference	(m)	15	20	
Refrigerant Pipe Size	Liquid (mm)	Ø 6.4		
	Gas (mm)	Ø 9.5	Ø 12.7	
	Drain (mm)	Ø 18.0	Ø 18	Ø 18.0
Operating Range (outdoor temp)	Cool (CDB)	10 to 46°	10 to 46°	
	Heat (CWB)	-10 to 20°	-15 to 20°	
Indoor Sound Level (H/M/L/SL)	Cool (dBA)	38/35/32/29	47/43/39/36	48/45/41/39
	Heat (dBA)	39/36/33/30	46/41/35/33	47/42/37/34
Outdoor Sound Level (H/L)	Cool (dBA)	47/44	47/44	49/46
	Heat (dBA)	48/45	48/45	49/46
EPA Sound Power Level	Outdoor (dBA)	63	62	63

For additional information on products in this table refer to notes on page 12.



Wall Mounted: Cooling Only



		COOLING ONLY			
INDOOR		FTKD25GVMA	FTKD35GVMA	FTKD50GVMA	FTKD60GVMA
OUTDOOR		RKD25DAVMA	RKD35DAVMA	RKD50BVMA	RKD60BVMA
Rated Capacity	Cool (kW)	2.5	3.6	5.0	5.9
Capacity Range	Cool (kW)	1.3-3.0	1.4-3.8	1.95-5.9	2.67-7.6
Indoor Airflow Rate (Hi)	Cool (l/s)	148	150	280	292
Indoor Fan Speeds		5 steps, quiet and automatic			
Energy Label/ Star Ratings	Cool	5.5	4.5	5	4
Front Panel Colour		White			
Power Supply		1 phase, 220-240V, 50Hz			
Power Input (Min-rated-max)	Cool (kW)	0.31-0.70-1.03	0.31-1.13-1.37	0.47-1.58-2.30	0.65-2.05-3.21
C.O.P.	C/H	3.5	3.2	3.2	2.9
Dimensions (H x W x D)	Indoor (mm)	283 x 800 x 195		290 x 1050 x 238	
	Outdoor (mm)	550 x 765 x 285		735 x 825 x 300	
Weight	Indoor (Kg)	9		12	
	Outdoor (Kg)	32	34	48	54
Compressor Type		Hermetically sealed swing type			
Refrigerant Type		R22			
Max Pipe Length	(m)	20		30	
Max Level Difference	(m)	15		20	
Refrigerant Pipe Size	Liquid (mm)	Ø 6.4		Ø 6.4	
	Gas (mm)	Ø 9.5	Ø 12.7	Ø 12.7	Ø 15.9
	Drain (mm)	Ø 18.0		Ø 18.0	
Operating Range (outdoor temp)	Cool (CDB)	10 to 46°		-5 to 46°	
Indoor Sound Level (H/M/L/SL)	Cool (dBA)	37/33/28/25	38/34/29/26	44/40/35/35	45/41/36/33
Outdoor Sound Level (H/L)	Cool (dBA)	46/43	47/44	47/44	49/46
EPA Sound Power Level	Outdoor (dBA)	61	62	63	64

For additional information on products in this table refer to notes on page 12.



Wall Mounted: Hybrid Split System™ Inverter Heating and Cooling

Daikin's Hybrid Split System combines technologies from both the inverter and traditional non inverter systems. Like a non inverter, the Hybrid Split System operates at its rated capacity and as the room temperature reaches the desired level, the system uses the intelligence of inverter technology to steadily maintain it without wild fluctuations.



CONTROLLER	INDOOR UNIT	OUTDOOR UNIT
R-410A 		
	(FTYN25/35G)	(RYN25/35D)
		
	(FTYN50G)* (FTYN60G)	(RYN50/60F)

		HEATING & COOLING			
INDOOR		FTYN25GV1A	FTYN35GV1A	FTYN50GV1A	FTYN60GV1A
OUTDOOR		RYN25DAV1A	RYN35DAV1A	RYN50FV1A	RYN60FV1A
Rated Capacity	Cool (kW)	2.6	3.4	5.2	5.9
	Heat (kW)	3.5	4.2	5.9	7.0
Indoor Airflow Rate (Hi)	Cool (l/s)	145	148	190	270
	Heat (l/s)	156	161	210	290
Indoor Fan Speeds		5 steps and automatic			
Energy Label/ Star Ratings	Cool	6	4.5	4	3.5
	Heat	5.5	4.5	4.5	4
Front Panel Colour		White		White	
Power Supply		1 phase, 220-240V, 50Hz			
Power Input (Rated)	Cool (kW)	0.73	1.10	1.50	2.05
	Heat (kW)	0.95	1.25	1.61	2.03
C.O.P.	C/H	3.5/3.6	3.1/3.4	3.4/3.6	2.9/3.4
Dimensions (H x W x D)	Indoor (mm)	283 x 800 x 195		290 x 795 x 238	290 x 1050 x 238
	Outdoor (mm)	550 x 765 x 285			
Weight	Indoor (Kg)	9		12	12
	Outdoor (Kg)	32	34	48	48
Compressor Type		Hermetically sealed swing type			
Refrigerant Type		R410A			
Max Pipe Length	(m)	20		30	
Max Level Difference	(m)	15		20	
Refrigerant Pipe Size	Liquid (mm)	Ø 6.4		Ø 6.4	
	Gas (mm)	Ø 9.5		Ø 12.7	
	Drain (mm) OD	Ø 18.0		Ø 18.0	
Operating Range (outdoor temp)	Cool (CDB)	10 to 46		10 to 46	
	Heat (CWB)	-10 to 20		-15 to 20	
Indoor Sound Level (H/M/L)	Cool (dBA)	37/31/25	38/32/26	44/40/35	45/41/36
	Heat (dBA)	37/33/28	38/34/29	42/38/33	44/40/35
Outdoor Sound Level	Cool (dBA)	46	47	47	49
	Heat (dBA)	47	48	48	49
EPA Sound Power Level	Outdoor (dBA)	62	63	62	62

For additional information on products in this table refer to notes on page 12.


*FTYN50G is not pictured in this brochure.





One of life's little comforts.


AIR CONDITIONING: WHAT TO LOOK FOR


Now that you've read this brochure you should have a basic understanding of all the benefits of a Daikin Air Conditioner. Here are some quick hints and tips to help you with your decision and ensure you get the right air conditioner for your needs.

 **Get the right size air conditioner for your home** – When buying an air conditioner, it's very important to seek expert advice. A Daikin Specialist Dealer is a great place to start. They will devote the time and effort to ensure you choose the right air conditioner for your individual needs.

 **Energy efficiency** – Daikin's advanced and innovative technology ensures your air conditioner is one of the most energy efficient units available. A Daikin Specialist Dealer will ensure you choose the most energy efficient air conditioner for your individual needs.

 **Professional installation** – Daikin's Specialist Dealer network does it all, offering you one great price covering the cost of the air conditioner plus installation. Your Daikin Specialist Dealer will make sure, whatever air conditioner you select is professionally installed so it works quietly and efficiently.

 **Certified operation in extremes** – When climatic conditions are extreme, either at their coldest or at their hottest, that's when you need your air conditioner the most. So when it's really cold, you're really warm and when it's uncomfortably hot, you're comfortably cool. Inverter models are very reliable even when temperatures are extreme. A Daikin Air Conditioner is certified to operate when temperatures soar as high as 46°C (cooling) or fall as low as minus 10°C (heating).

 **Noise level considerations** – It's very important to consider the noise level of an air conditioner whether it is inside or outside. Noise level should be minimal so that the indoor and outdoor unit doesn't disturb anyone.

SUPERIOR TECHNOLOGY IN AIR CONDITIONING SOLUTIONS

Daikin's comprehensive range of domestic and commercial air conditioners provides superior comfort and efficiency to any sized building or space.

From a small apartment to a multi-storey building, Daikin has the air conditioning solution.


Research and development in the areas of mechanics, electronics and chemicals, enables Daikin to select components that will work seamlessly together, giving you an air conditioning system of the highest quality and reliability.

Daikin's state-of-the-art management control and monitoring systems provide added energy efficiency, improved maintenance and cost reduction for any commercial air conditioning installation. Most Daikin units can be incorporated into these management control systems.

DUCTED

A Daikin Ducted System provides air conditioned comfort all year round, all around the house, to new and existing homes. The unobtrusive and quiet compressor unit is installed outside the home. The indoor unit is usually located in the ceiling or under the floor with flexible ductwork distributing conditioned air through vents located throughout the house. Daikin Ducted Systems can be designed to operate in two or more zones, and these zones can be heated or cooled at different times.

Daikin incorporates advanced technologies in its inverter ducted units that allow for quiet operation, energy savings and optimum comfort.

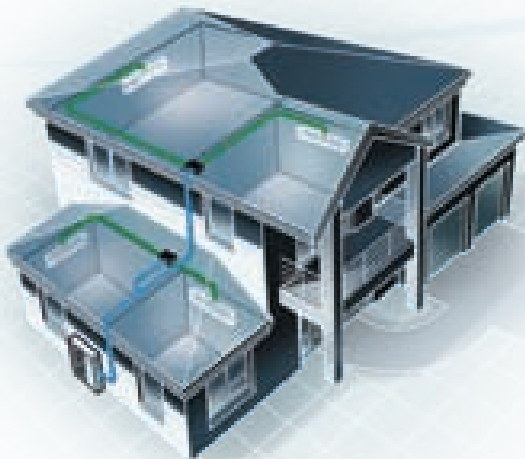

SUPER MULTI-SPLIT SYSTEMS

A Daikin Multi-Split System can air condition up to nine rooms using only one outdoor unit. Multi-split systems are ideal for situations where there is limited space for outdoor units or insufficient ceiling space for ducting. A Daikin Multi-Split System allows individual control of the air conditioning in each room, optimising comfort levels and making significant savings on running costs, as wastage is eliminated by only air conditioning rooms as you need to.

SKYAIR

Easy installation and great flexibility makes SkyAir ideal for shops, restaurants, offices, schools, showrooms and even larger residential rooms. The SkyAir Super Inverter series can provide savings on energy costs, compared to the non-inverter equivalent models.

There is a wide selection of models available meaning SkyAir can provide the answer to any air conditioning need.



CONTROLS

State of the art control systems compatible with Daikin's range of units deliver advanced monitoring and management and superior levels of comfort control.



COMMERCIAL

Daikin Air Conditioners are installed in thousands of commercial buildings around Australia and are the preferred choice when comfort, superior quality, flexibility and economy are key requirements.

Daikin's revolutionary VRV III (Variable Refrigerant Volume) systems are dramatically changing the way a wide range of new and existing high rise and low rise commercial buildings are air conditioned. Compared to conventional systems, VRV III reduces energy bills, lowers installation and operating costs and increases occupant comfort, VRV III heat recovery systems provide further energy savings.

Daikin also has a wide range of Ceiling-Mounted Ducted Air Conditioners, Rooftop Packaged Units, Floor-Standing Packaged Units and Chillers.

THE DAIKIN AIR PURIFIER

Using the world's first Titanium Apatite Photocatalytic filter, Daikin Australia has introduced an air purifier that not only removes minute airborne particles from a room and gets rid of unpleasant odours but also adsorbs and deactivates viruses and bacteria.

The Daikin Air Purifier is powerful yet quiet and **energy efficient**. Its compact, attractive design and easy portability makes it ideal for homes, offices, waiting rooms and smaller shops and salons.

Four-directional suction allows the air purifier to quickly draw in dust and odours from all parts of the room and by distributing negative ions the unit gives the air a healthier and refreshing feel.



WARRANTY

The Daikin 5 year Parts and Labour Warranty applies only to products on pages 5 – 20 purchased and installed in Australia or New Zealand.



ASSUMPTIONS

All representations made in Daikin Marketing and Promotional material is based on the assumptions that the correct equipment has been selected, appropriately sized and installed in accordance with Daikin's installation instructions and standard industry practices.

ENVIRONMENT QUALIFICATIONS

Daikin Industries Limited have received ISO 14001 Environmental Certification for the Daikin production facilities listed below. ISO 14001 is an international standard specifying requirement for an environmental management system, enabling an organisation to formulate policy and objectives, taking into account legislative requirements and information about significant environmental impacts. It applies to those environmental aspects within the organisation's control and over which it can be expected to have an influence.

Residential Air Conditioning Manufacturing Div. (ISO 9001)
JQA-0486 May 2, 1994 (Shiga Plant)

Commercial Air Conditioning and Refrigeration Manufacturing Div. (ISO 9001)
JMI0107 December 28, 1992 (Kanaoka Factory and Rinkai Factory at Sakai Plant)

Industrial System and Chiller Products Manufacturing Div. (ISO 9001)
JQA-0495 May 16, 1994 (Yodogawa Plant and Kanaoka Factory and Kishiwada Factory)

Daikin Europe N.V. (ISO 9001)
Lloyd 928589.1 June 2, 1993

Daikin Industries (Thailand) Ltd. (ISO 9001)
JQA-1452 September 13, 2002 (ISO 9001)

Daikin Australia Pty Limited (ISO 9001)
QEC 23256 May 31, 2006
Sydney, Brisbane, Adelaide, Melbourne, Newcastle, Townsville, Perth
CEM 20437 October 27, 2006
Sydney, Brisbane

The certification relates only to the environmental management system and does not constitute any endorsement of the products shipped from the facility by the International Organisation for Standardisation.

Head Office / Tokyo Office Certificate number: EC02J0355

Shiga Plant (Japan) Certificate number: EC99J2044

Sakai Plant (Japan) Certificate number: JQA-E-80009

Daikin Industries Ltd (Thailand) Certificate number: JQA-E-90108

Yodogawa Plant (Japan) Certificate number: EC99J2057

QUALITY QUALIFICATIONS

Daikin Industries Limited is the first air conditioning equipment manufacturer in Japan to receive ISO 9001 certification.

All Daikin manufacturing facilities have been certified to ISO 9001 Quality Management

System requirements. ISO 9000 Series Certificate is awarded to suppliers fulfilling the requirements of ISO standards. ISO 9001 is a certificate for quality assurance concerning 'design, development, manufacturing, installation and related service' of products manufactured at that factory.



The ARClick logo identifies businesses with a Refrigerant Trading Authorisation and technicians with a Refrigerant Handling Licence.



That's the Daikin difference

Daikin Australia Pty Limited ABN 62 000 172 967

Email sales@daikin.com.au

Visit our website at www.daikin.com.au or www.daikin.co.nz
For your nearest **Daikin Dealer** call 1300 368 300 (Australia only)
or 1300 DAIKIN (Australia only) 0800 324 546 (New Zealand)

Dealer:

Locations: Sydney, Brisbane, Adelaide, Melbourne, Darwin, Newcastle, Townsville, Perth, Tasmania, Auckland

The specifications, designs and information in this brochure are subject to change without notice. Unit colours shown are as close as possible to actual unit colours. Colours depicted in this brochure may vary slightly.